



INSTRUMENTS

# PORTABLE OXYGEN MONITOR


## MODEL

# OX-07

**JML approved**

**(Japanese Ministry of Labor)**

**ATEX · IECEx approval Pending**

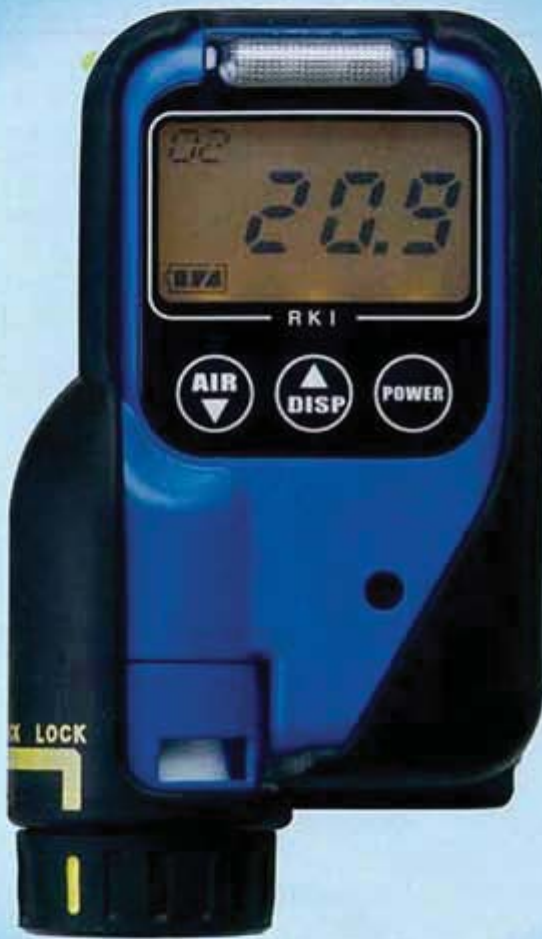

## Features

- Intrinsically safe ExiallCT3
- Extension cable available (5m standard, 10m, 20m and 30m)
- Maximum 5000 hours of continuous operation by 2 "AA" alkaline dry cells
- Impact resistant protective rubber boot
- Large LCD display with auto backlight
- Audible/visual/vibration alarms
- Compact and light weight
- 66W × 114H × 33D mm, 230g only



TOKYO PLANT - OKAGAWA FACTORY  
IKEN KENJI ESAN SESAKUSHO CO., LTD.



TOKYO PLANT - OKAGAWA FACTORY

# PORTABLE OXYGEN MONITOR MODEL OX-07

## Specifications

Type	Type A	Type B
Gas detected	Oxygen in air	
Detection principle	Galvanic cell	
Detection range (Increments)	0.0-40.0%vol. (0.1%vol.)	
Alarm set point	Low alarm 19.5%vol. High alarm 23.5%vol. Over 40.0%vol.	No alarm
Trouble alarm	Sensor disconnection, low battery, circuit failure, calibration range error	
Alarm types	Gas alarm : flashing light, intermittent buzzer and flashing gas value, pulsing vibration	No alarm
	Trouble alarm : flashing light, intermittent buzzer and Display of error message	
Display	Digital display	
Power source	Alkaline dry cells (2-AA size), 2pcs	
Continuous operation	Maximum 5000 hours (at 25°C, and no alarm, no backlight)	
Safety design	Intrinsically safe (ExiallCT3)	
Operating temp. & humidity	-20°C ~+50°C : Humidity below 95%RH (non-condensing)	
Special functions	Manual backlight for LCD (automatically lit during alarm) Peak hold (maximum and minimum)	
Dimensions & weight	Approx. 66(W)×114(H)×33(D)mm    Approx. 230g (Instrument only)	
Standard accessories	Hand strap	
Optional accessories	Extension cable 5m, 10m, 20m, 30m, Carrying case	



**OX-07 Type A**  
with extension cable

**Standard accessories**



Hand strap

**Optional accessories**



Extension cable



Carrying case

## Authorized Distributor:



Toll Free: 800.739.7706 Fax: 717.901.8114

[www.envisupply.com](http://www.envisupply.com)